




深圳市四量科技有限公司
ShenZhen LSLH Technology Co., Ltd.

LED Linear High Bay




Web: www.lslh-tech.com.com




Product Features

1. CE & FCC listed; With LM79 & LM80;
2. Power: 50W & 100W & 150W & 200W & 250W;
3. High luminous efficacy 130lm/w;
4. High quality isolated driver; Flicker free;
5. PF > 0.90, driver efficiency > 87%; THD < 20%;
6. Installation: pendant, chain mounting;
7. Suitable for dry/damp location;
8. Designed for warehouses, gymnasiums, and industrial spaces;
9. CCT: 3000K & 4000K & 6000K
10. Five years warranty.


Product Dimension

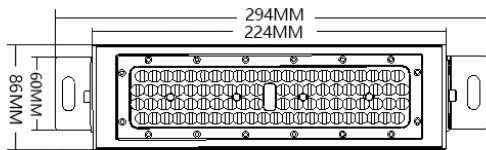


Group 1

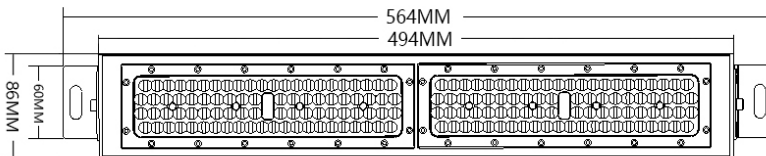


Group 2

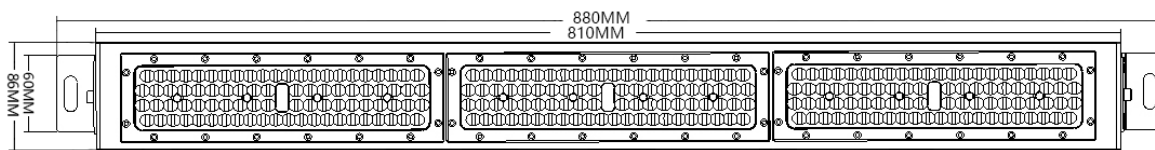


Group 3

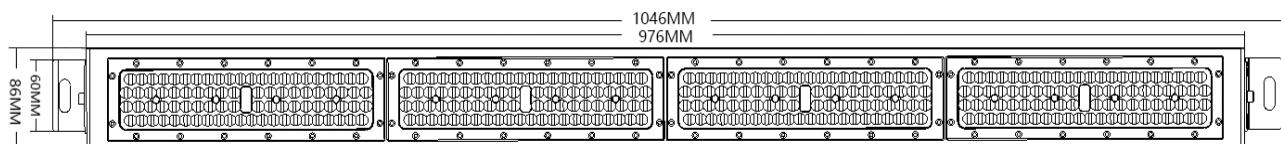

Group 4

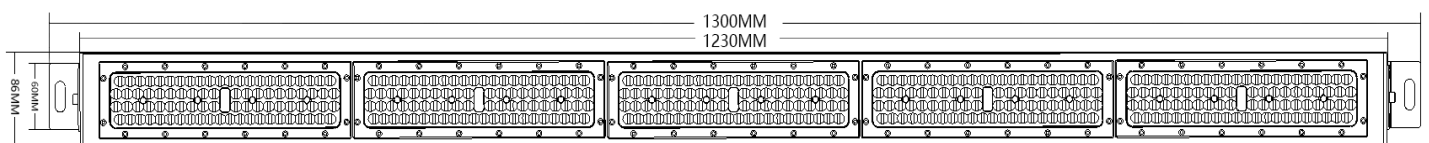

Group 5






Port No.	Out length	Wide	Out high	Inner length	Inner high
LSLH LW1 50W	294mm (11.6")	86mm (3.4")	134.4mm (5.3")	224mm (8.8")	53mm (2.1")
LSLH LW2 100W	564mm (22.2")	86mm (3.4")	134.4mm (5.3")	494mm (19.4")	53mm (2.1")
LSLH-LW3-150W	880mm (34.6")	86mm (3.4")	134.4mm (5.3")	810mm (31.9")	53mm (2.1")
LSLH-LW4-200W	1046mm (41.2")	86mm (3.4")	134.4mm (5.3")	976mm (38.4")	53mm (2.1")
LSLH-LW5-250W	1300mm (51.2")	86mm (3.4")	134.4mm (5.3")	1230mm (48.2")	53mm (2.1")

Specification

Name	Beam Angle	Part No.	Power	Input Voltage	Input Current		LED Strip	PF	Light Efficacy	CCT	Ra
					110V	220V					
LED Linear High Bay	15° /30° 60° /120°	LSLH-LW1-50W	50W	AC100-277V	0.45A	0.23A	1 (84PCS)	>0.9	130LM/W	3000K 4000K 6000K	>80
	15° /30° 60° /120°	LSLH-LW2-100W	100W		0.9A	0.45A	2 (168PCS)	>0.9			
	15° /30° 60° /120°	LSLH-LW3-150W	150W		1.36A	0.68A	3 (252PCS)	>0.9			
	15° /30° 60° /120°	LSLH-LW4-200W	200W		1.82A	0.9A	4 (336PCS)	>0.9			
	15° /30° 60° /120°	LSLH-LW5-250W	250W		2.27A	1.14A	5 (420PCS)	>0.9			



Testing Report

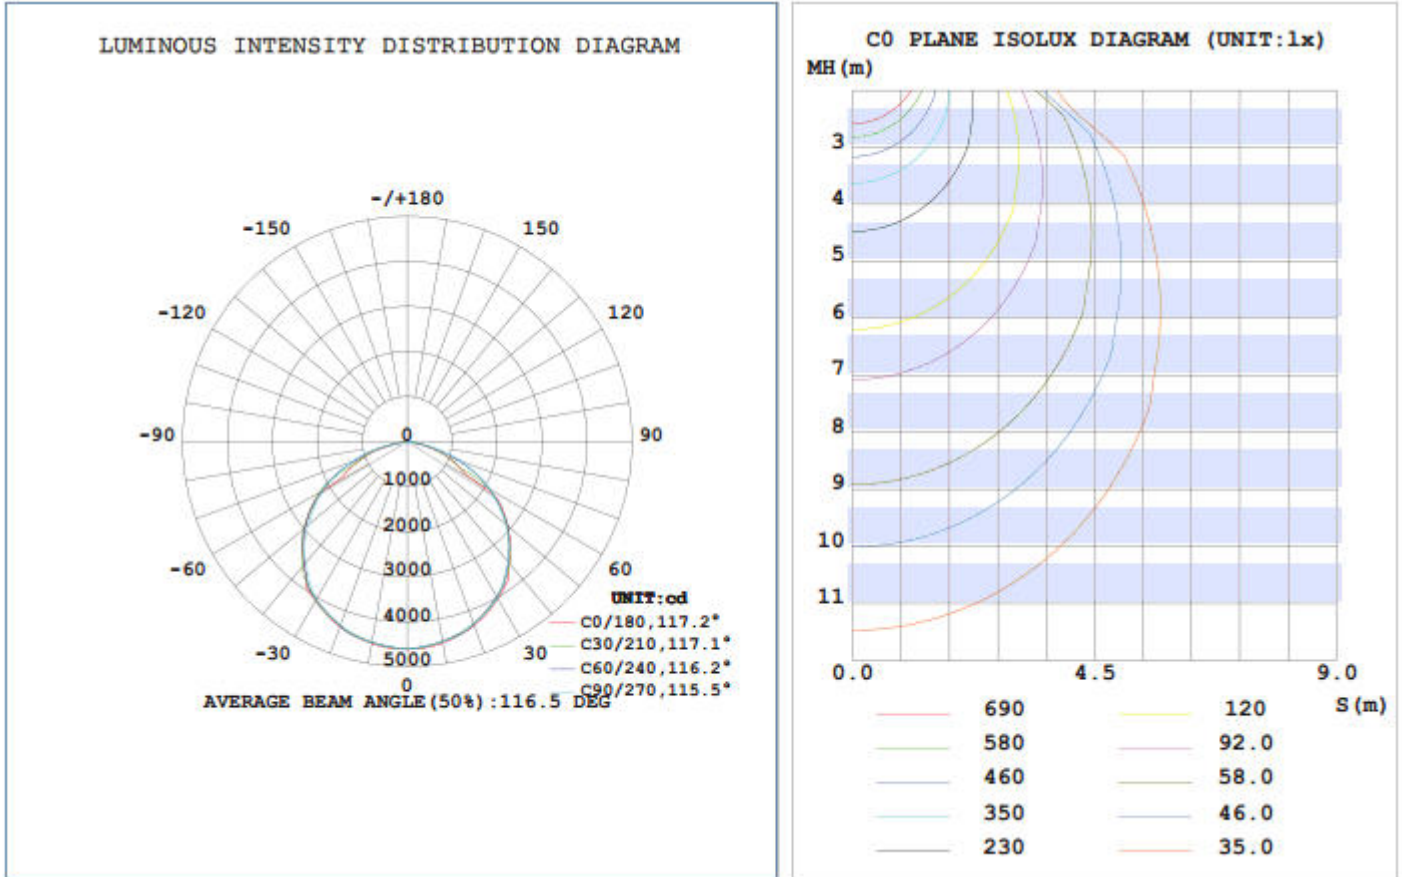

Applications





Packing /weight

Part No.	Outer Carton Size (L*W*H)	Oty/Carton (PCS)	Net Weight	Gross Weight
LSLH LW1 50W	400*120*170mm (15.7"*4.7"*6.7")	1	1.93KG	2.37KG
LSLH LW2 100W	650*120*170mm (25.6"*4.7"*6.7")	1	3.25KG	3.62KG
LSLH LW3 150W	920*120*170mm (36.2"*4.7"*6.7")	1	4.42KG	4.92KG
LSLH-LW4-200W	1200*135*195mm (47.2"*5.3"*7.7")	1	6.23KG	6.86KG
LSLH-LW5-250W	1420*135*195mm (55.9"*5.3"*7.7")	1	7.21KG	7.68KG

Note

- 1.The installation and maintenance must be completed by electricians or professionals.
- 2.Please cut off the power before installation and maintenance.
- 3.The thermally insulating material is not allowed to cover the fixture.
- 4.Please keep away from the corrosive substance, and keep the fixture dry and clean.
- 5.Working temperature: -20°C~40°C, storage temperature: -30°C~60°C.