

LED Linear High bay light


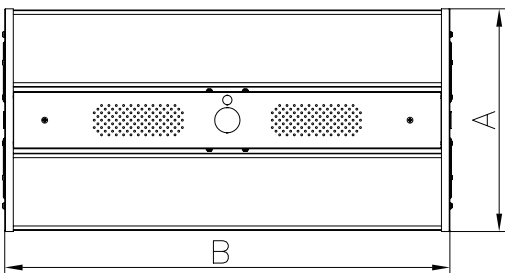
LED Linear high bay lighting is a popular choice in warehouse lighting. They are easy to hang with two gibber cables and easy to connect with the junction box right on back. Popular for their wide light distribution, they are a great choice for going LED and saving energy.



Product Features

1. Comply with UL certification standards, With LM79 & LM80;
2. 2ft:165W MAX & 220W MAX available ;
3. High luminous efficacy 140lm/w;
4. 0-10V dimming;
5. PF > 0.90, driver efficiency > 87%; THD < 20%;
6. Installation: chain mounting;
7. Suitable for dry/damp location;
8. Designed for warehouses, gymnasiums, and industrial spaces;
9. CCT: 4000K & 5000K & 5700K & 6500K ;
10. Power tunable and CCT Switchable available ;

Product Dimension




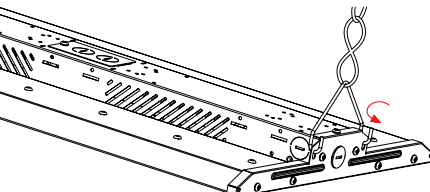
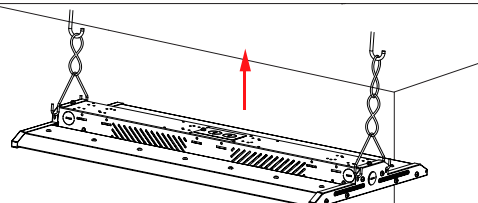
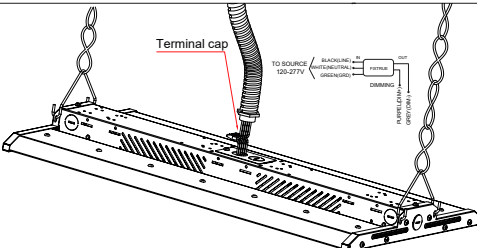
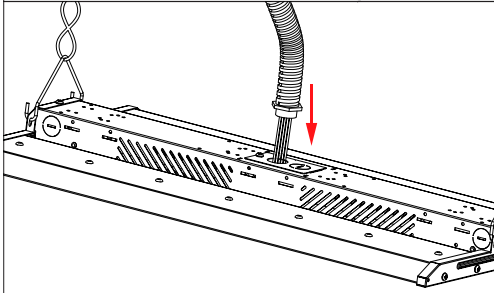
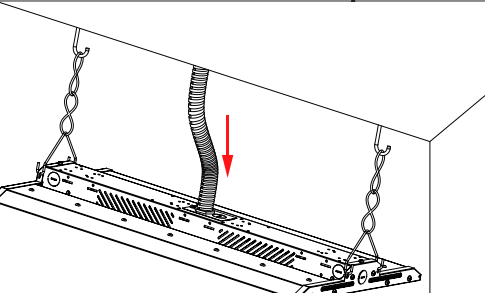
Part No.	A	B	C	D
LSLH-LHB06-L1-80W				
LSLH-LHB06-L1-110W	11.81"	23.62"	0.91"	1.87"
LSLH-LHB06-L2-165W	300mm	600mm	23mm	47.5mm
LSLH-LHB06-L3-165W				
LSLH-LHB06-L3-220W	14.17"	23.62"	0.91"	1.87"
LSLH-LHB06-L5-225W	360mm	600mm	23mm	47.5mm
LSLH-LHB06-L5-300W	14.17"	35.10"	0.91"	1.87"
LSLH-LHB06-L5-300W	360mm	891.5mm	23mm	47.5mm
LSLH-LHB06-L2-165W (165/110/80)	11.81"	23.62"	0.91"	1.87"
LSLH-LHB06-L3-220W (220/165/110)	300mm	600mm	23mm	47.5mm
LSLH-LHB06-L3-220W (220/165/110)	14.17"	23.62"	0.91"	1.87"
LSLH-LHB06-L3-220W (220/165/110)	360mm	600mm	23mm	47.5mm



Specification

Name	Part No.	Power	Input Voltage	Input Current	PF	Light Efficacy	CCT	Ra
Linear high bay	LSLH-LHB06-L1-80W	80W	AC120-277V	0.733A	>0.9	140lm/W	4000K 5000K 5700K 6500K	80
	LSLH-LHB06-L1-110W	110W		1.009A				
	LSLH-LHB06-L2-165W	165W		1.51A				
	LSLH-LHB06-L3-165W	165W		1.51A				
	LSLH-LHB06-L3-220W	220W		2.017A				
	LSLH-LHB06-L5-225W	225W		2.06A				
	LSLH-LHB06-L5-300W	300W		2.75A				
	LSLH-LHB06-L2-165W (165/110/80)	165W		1.51A				
LSLH-LHB06-L3-220W (220/165/110)	220W	2.017A	3500K 4000K 5000K					

Chain Installation

- Hook the chain as below pic.
 
- Insert the hook into the slotted holes, as shown below.
 
- Hook up the chain on the ceiling anchor.
 
- Turn off power, and make wiring connections with terminal cap (see wiring instruction below).
 
- Insert the terminal cap and wires into the driver box.
 
- Insert the wire terminal joint to the wire entry. Installation completed.
 

// Applications



// Packing/Weight

Part NO.	Outer Carton Size (L×W×H)	Qty/Carton (pcs)	Net weight (lbs/KG)	Gro.SLH weight (lbs/KG)
LSLH-LHB06-L1-80W	(25.59''*13.98''*3.94'') (650*355*100mm)	1	5.36 2.43KG	6.73 3.05KG
LSLH-LHB06-L1-110W	(25.59''*13.98''*3.94'') (650*355*100mm)	1	5.38 2.44KG	6.75 3.06KG
LSLH-LHB06-L2-165W	(25.59''*13.98''*3.94'') (650*355*100mm)	1	5.38 2.44KG	6.75 3.06KG
LSLH-LHB06-L3-165W	(25.98''*16.73''*4.33'') (660*425*110mm)	1	7.14 3.24KG	8.93 4.05KG
LSLH-LHB06-L3-220W	(25.98''*16.73''*4.33'') (660*425*110mm)	1	7.14 3.24KG	8.93 4.05KG
LSLH-LHB06-L5-225W	(37.40''*16.73''*4.33'') (950*425*110mm)	1	9.37 4.25KG	11.84 5.37KG
LSLH-LHB06-L5-300W	(37.40''*16.73''*4.33'') (950*425*110mm)	1	9.39 4.26KG	11.86 5.38KG
LSLH-LHB06-L2-165W (165/110/80)	(25.59''*13.98''*3.94'') (650*355*100mm)	1	5.38 2.44KG	6.75 3.06KG
LSLH-LHB06-L3-220W (220/165/110)	(25.98''*16.73''*4.33'') (660*425*110mm)	1	7.14 3.24KG	8.93 4.05KG

// Note

- 1.The installation and maintenance must be completed by electricians or professionals.
- 2.Please cut off the power before installation and maintenance.
- 3.The thermally insulating material is not allowed to cover the fixture.
- 4.Please keep away from the corrosive substance, and keep the fixture dry and clean.
- 5.Working temperature: -4°F~122°F, storage temperature: -22°F~158°F.