



## LED Linear High bay light

LED Linear high bay lighting is a popular choice in warehouse lighting. They are easy to hang with two gibber cables and easy to connect with the junction box right on back. Popular for their wide light distribution, they are a great choice for going LED and saving energy.




### Product Features

1. CE & FCC listed; With LM79 & LM80;
2. Power: 50W & 100W & 150W & 200W & 250W;
3. Length and power can be produced as required;
4. High luminous efficacy 140lm/W; Beam angle: 60°/90° ;
5. High quality isolated driver; Flicker free;
6. PF > 0.90, driver efficiency > 87%; THD < 20%;
7. Installation: pendant, chain mounting;
8. Suitable for dry/damp location;
9. Designed for warehouses, gymnasiums, and industrial spaces;
10. CCT: 3000K & 4000K & 6000K ;
11. Five years warranty.



## Product Dimension

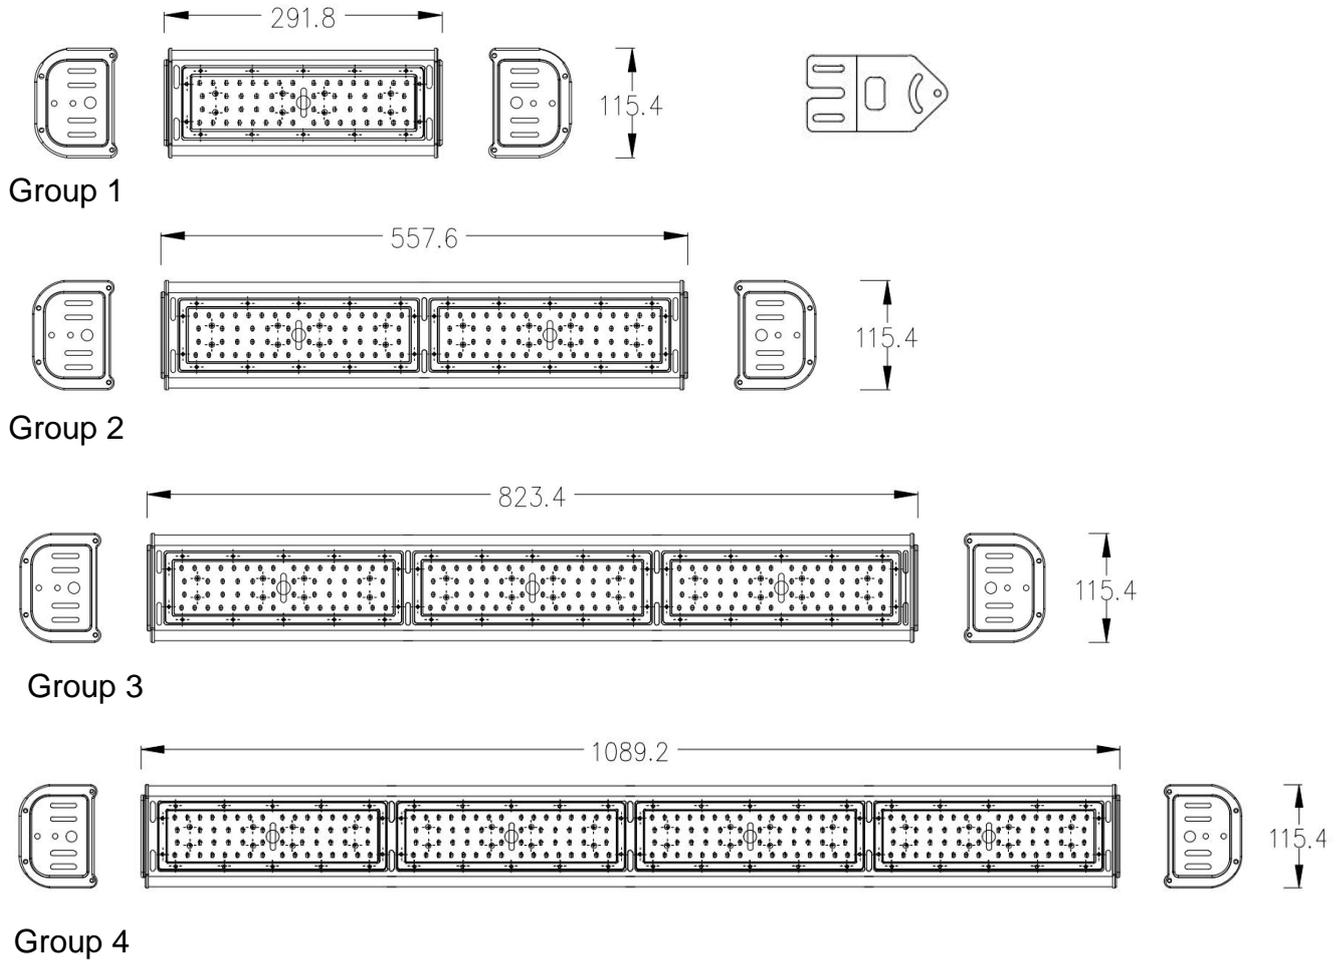



Prot No.	Length	Wide	High	Thermal Conductivity
LSLH-HXTD-50W	291.8MM	115.4MM	85MM	1.5W/(M.K)
LSLH-HXTD-100W	557.6MM	115.4MM	85MM	1.5W/(M.K)
LSLH-HXTD-150W	823.4MM	115.4MM	85MM	1.5W/(M.K)
LSLH-HXTD-200W	966.0MM	115.4MM	85MM	1.5W/(M.K)



## Specification


Name	Beam Angle	Part No.	Power	Input Voltage	Input Current		LED Strip	PF	Light Efficacy	CCT	Ra
					110V	220V					
LED Linear High Bay	60°/90°	LSLH-HXTD-50W	50W	AC100-277V	0.45A	0.23A	1 (56PCS)	>0.9	140LM/W	3000K 4000K 6000K	>80
	60°/90°	LSLH-HXTD-100W	100W		0.9A	0.45A	2 (112PCS)	>0.9			
	60°/90°	LSLH-HXTD-150W	150W		1.36A	0.68A	3 (168PCS)	>0.9			
	60°/90°	LSLH-HXTD-200W	200W		1.82A	0.9A	4 (224PCS)	>0.9			

## Testing Report

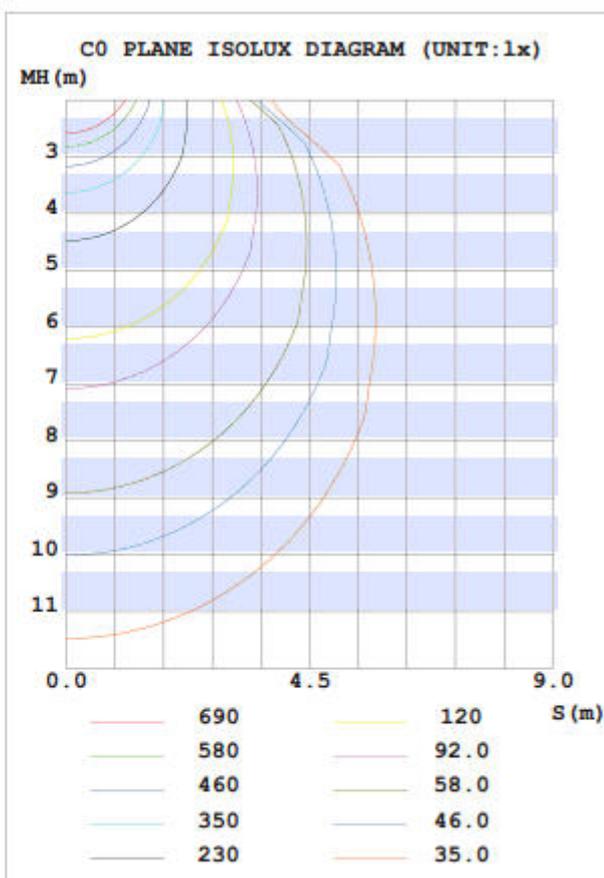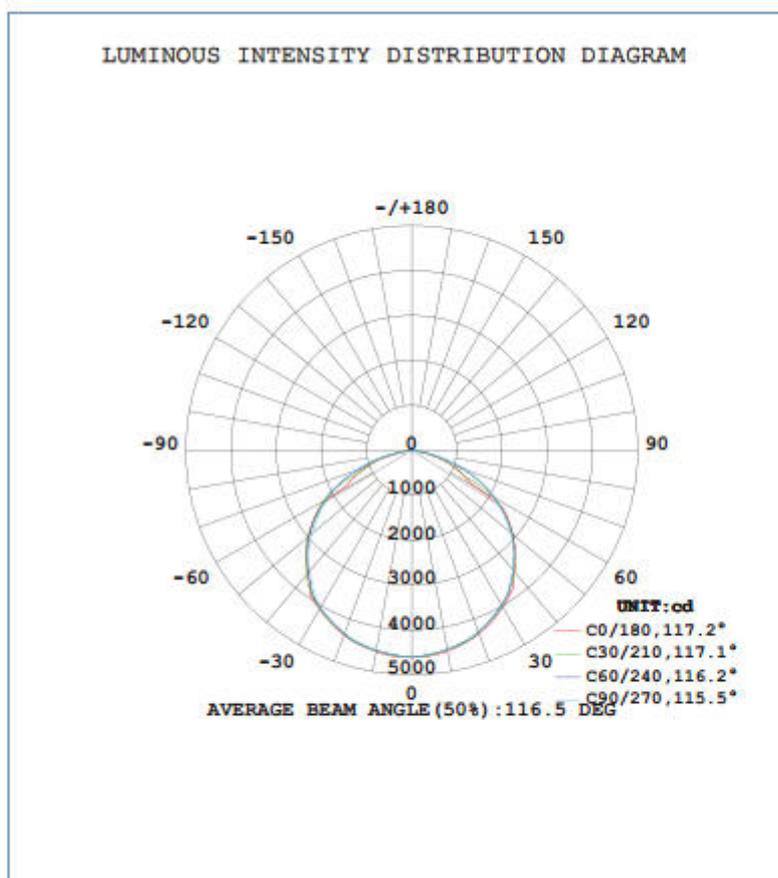



## Applications

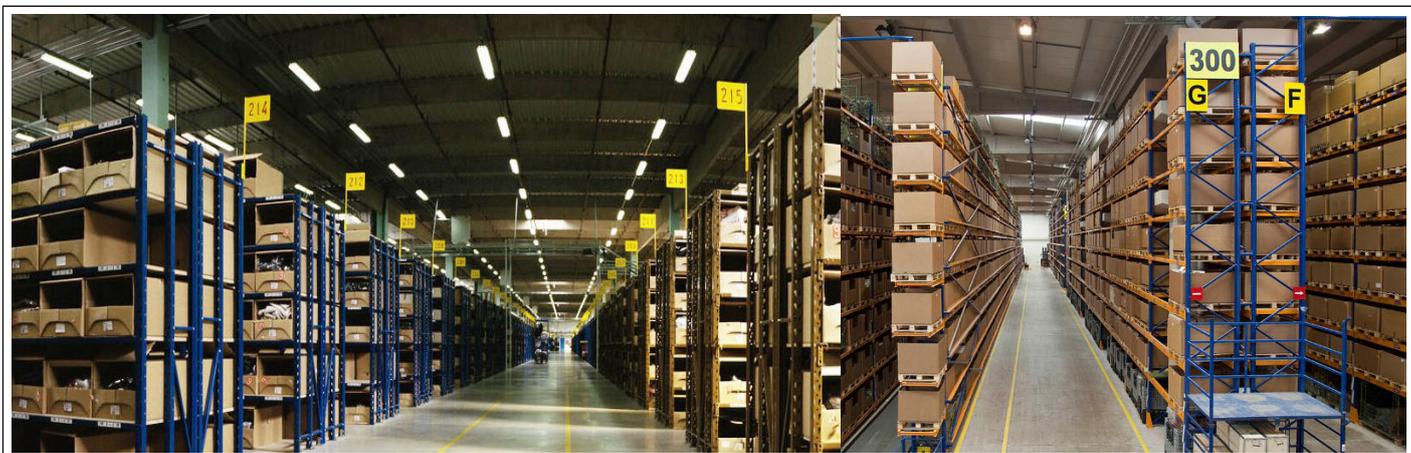

## Packing /weight

Part No.	Outer Carton Size (L*W*H)	Oty/Carton (PCS)	Net Weight	Gross Weight
LSLH-HXTD-50W	420*150*150mm	1	1.5KG	1.8KG
LSLH-HXTD-100W	680*150*150mm	1	2.7KG	2.98KG
LSLH-HXTD-150W	950*150*150mm	1	3.5KG	3.92KG
LSLH-HXTD-200W	1220*150*150mm	1	4.4KG	5.23KG

## Note

- 1.The installation and maintenance must be completed by electricians or professionals.
- 2.Please cut off the power before installation and maintenance.
- 3.The thermally insulating material is not allowed to cover the fixture.
- 4.Please keep away from the corrosive substance, and keep the fixture dry and clean.
- 5.Working temperature: -20°C~40°C, storage temperature: -30°C~60°C.